

## Dual feedback controlled high performance Ar seeded ELMy H-Mode discharges in JET including trace tritium experiments

P. Dumortier<sup>1</sup>, G. Bonheure<sup>1</sup>, R. Felton<sup>2</sup>, J. Harling<sup>2</sup>, E. Joffrin<sup>3</sup>, A. Messiaen<sup>1</sup>, J. Ongena<sup>1</sup>,  
P. Belo<sup>4</sup>, L. Bertalot<sup>5</sup>, I. Coffey<sup>6</sup>, Y. Corre<sup>7</sup>, K. Crombe<sup>8</sup>, M. de Baar<sup>9</sup>, A. Huber<sup>10</sup>,  
D. Kalupin<sup>10</sup>, A. Kreter<sup>10</sup>, S. Jachmich<sup>1</sup>, G. Maddison<sup>2</sup>, P. Monier-Garbet<sup>3</sup>, A. Murari<sup>11</sup>,  
M.F.F. Nave<sup>4</sup>, V. Parail<sup>2</sup>, S. Popovichev<sup>2</sup>, M.E. Puiatti<sup>11</sup>, G. Telesca<sup>8</sup>, M. Tokar<sup>10</sup>,  
B. Unterberg<sup>10</sup>, M. Valisa<sup>11</sup>, I. Voitsekhovitch<sup>2</sup>, M. von Hellermann<sup>8</sup> and contributors to  
the EFDA-JET workprogramme\*

<sup>1</sup> LPP-ERM/KMS, Euratom-Belgian State Association, Brussels, Belgium<sup>†</sup>

<sup>2</sup> EURATOM/UKAEA Fusion Association, Culham Science Center, Abingdon, Oxon, OX14 3DB, UK

<sup>3</sup> Association EURATOM/CEA CEA CADARACHE, DRFC, 13108 Saint-Paul-Lez-Durance, France

<sup>4</sup> Associação Euratom-IST, Centro de Fusão Nuclear, 1049-001 Lisbon, Portugal

<sup>5</sup> Associazione Euratom-ENEA sulla Fusione, C.R. Frascati, C.P. 65, Frascati, I-00044, Roma, Italy

<sup>6</sup> Queen's University, Belfast, BT7 1NN, UK

<sup>7</sup> Association Euratom-VR, KTH Royal Institute of Technology, SE-100 44 Stockholm, Sweden

<sup>8</sup> Department of Applied Physics, University of Ghent, Belgium

<sup>9</sup> FOM-Rijnhuizen, Ass. Euratom-FOM, PO Box 1207, 3430 BE Nieuwegein, NL<sup>†</sup>

<sup>10</sup> IPP, Forschungszentrum Jülich GmbH, EURATOM Association, D-52425 Jülich, Germany<sup>†</sup>

<sup>11</sup> Consorzio RFX - Associazione Euratom-Enea sulla Fusione, I-35127 Padova, Italy

<sup>†</sup>Partners in the Trilateral Euregio Cluster (TEC)

### Summary

A dual feedback control system was successfully implemented on JET to control high performing Ar seeded ELMy H-mode discharges. Controlled parameters are the confinement enhancement factor  $H_{98}(y,2)$  and the total (or partial) radiated power fraction  $\gamma = P_{\text{rad}}/P_{\text{tot}}$ . Control parameters are the Deuterium and impurity (Ar) fuelling rates. This scheme was applied to trace T discharges and lead to discharges exhibiting the following performance:  $H_{98}(y,2) \approx 1$ ,  $n/n_{\text{GW}} \approx 1$ ,  $\beta_n \approx 2$  and  $\gamma \approx 0.65$ . The total radiated power was not significantly increased as compared to the unseeded reference case due to large intrinsic radiation inherent to the used configuration (HT3 with the MkiIGB-SRP divertor) and the “exchange” between intrinsic and extrinsic radiation. The time of penetration of T is higher in the Ar seeded case but this is essentially explained by the higher density reached.

### Dual feedback control: motivation and principle

The reference scenario for ITER is operation in ELMy H-mode with  $n/n_{\text{GW}} = 0.85$ ,  $\beta_n = 1.8$  and  $H_{98}(y,2) = 1$ . These values are routinely achieved in JET in Ar seeded ELMy H-mode discharges [1,2,4]. The seeding of low Z impurities aims at modifying the

---

\* See annex of J. Pamela et al, "Overview of JET Results", Fusion Energy 2002 (Proc. 19th Int. Conf. Lyon, 2002), IAEA, Vienna (2003).

radiation pattern of the plasma allowing a better radiated power distribution and reducing the divertor target load.

Previous experiments demonstrated the potential benefits of Ar seeding in terms of integrated scenario [1,2]. A major concern in this scenario is the stationarity of the discharge: main plasma parameters are indeed very sensitive not only to the Ar seeding rate but also to the D<sub>2</sub> fuelling rate. Furthermore both are not acting independently. Hence the difficulty to predict the necessary main and impurity gas rates and the necessity to develop a feedback system to control these.

A dual feedback system was developed in order to control both the values of H98(y,2) and  $\gamma = P_{\text{rad}}/P_{\text{tot}}$ . The D<sub>2</sub> puffing rate and the Ar seeding rate are used as actuators. Confinement and radiation were chosen as controlled parameters since they were the best correlated quantities with the actuators and that it preserves the confinement quality of the discharge. Furthermore it allows to maximise the D<sub>2</sub> fuelling rate for a given confinement and radiation. The feedback scheme uses a 2 by 2 control matrix, which is established from open-loop experiments with step requests for the actuators and is valid around the chosen operational point. The plasma model – essentially described by this matrix - is then tested on several discharges from the existing database. If the plasma model is satisfactory it is implemented in the feedback loop (Fig. 1) in order to test the stability of the scheme and optimize the PIDs. Once confident, the feedback loop can be closed and used in real situation. This scheme is only valid around the operating point for which the control matrix has been determined.

### **Application to trace T discharges**

Both tritium (T) beam blips and T gas puffs have been applied in these discharges. Fig. 2 shows an example of two discharges with a T puff: one with Ar seeding and a reference discharge without Ar seeding. The T is puffed at 20 s. In the case of the Ar seeded discharge, the dual feedback on H98(y,2) and  $\gamma$  was used. In the reference discharge, a single feedback on H98(y,2) with the D<sub>2</sub> fuelling rate as actuator was used. Both discharges are under same machine and operational conditions. Performance of the Ar seeded discharge is as follows:  $H98(y,2) \approx 1$ ,  $n/n_{\text{GW}} \approx 1$ ,  $\beta_n \approx 2$  and  $P_{\text{rad}}/P_{\text{tot}} \approx 0.65$ . The neutron yield is lower for the Ar seeded discharge but this is essentially due to the lower electron temperature resulting from the higher density reached in this discharge. Note that discharges with similar density and confinement performance can also be achieved without Ar seeding [5]. There is no increase in  $Z_{\text{eff}}$ .

Interpretative transport analysis using the TRANSP code shows a reduction of ion thermal and particle transport achieved in the Ar seeded discharge as compared to the reference case [6]. The plasma density increases by 20% with the same D source when Ar is

injected and the  $\chi_{\text{eff}}$  value reduces by a factor 2 in the gradient zone due to reduced thermal ion diffusivity.

As can be seen from Fig. 2 the total radiated power fraction is not significantly larger with the Ar seeding. This is due to the high intrinsic radiation inherent to the HT3 configuration used with the MkIIGB-SRP divertor (in opposition to the EHT configuration used with the MkIIGB divertor [1]). In this case the extrinsic radiation partly replaces the intrinsic radiation and the total radiation is not changed much. This leads to the choice of another control parameter in subsequent experiments: the partial radiated power fraction  $\gamma_u = P_{\text{rad,u}}/P_{\text{tot}}$ , where  $P_{\text{rad,u}}$  is an estimate of the radiated power in the main chamber, i.e. not taking into account X-point nor divertor radiation. This feedback scheme was successfully tested with steps in the requested values around the operating point.

T penetration is monitored in the discharges with T puffs by observing the delays, rise-times and decays of each channel of the 19-channel neutron camera. This camera is equipped with two sets of detectors (Ne213 and Bicron) detecting the 14 MeV D-T neutron emission, which showed the same characteristics for the penetration of T puff into the plasma. Fig. 3a displays the normalized channel intensity for 5 channels of the Bicron detector (channel 1 being the most outward channel) for the two discharges of Fig. 2. The maximum of the neutron emissivity happens later for the more central chords in the Ar seeded case reflecting a longer time of penetration of the T. Fig. 3b displays the normalized channel intensities for the Ar seeded discharge and for a discharge without Ar seeding reaching the same density as the Ar seeded one but at different machine and operating conditions ( $B_t = 2.25\text{T}$  instead of  $2.7\text{T}$ ). Time of penetration is similar in this case.

Predictive modelling of these three discharges using the JETTO-SANCO code shows that anomalous contribution to T transport is reduced in high density discharges so that overall T particle diffusivity and pinch velocity approach the neo-classical level. Plasmas with lower density require significant contribution from anomalous transport to ensure observed faster penetration of tritium particles towards the plasma centre [7].

Interpretative transport analysis using the TRANSP code also leads to the conclusion that the T pinch is close to the neo-classical value at high density whereas it becomes strongly anomalous at low density [6].

## References

- [1] P. Dumortier et al., Plasma Phys. Control. Fusion **44**(2002)1845-1861
- [2] J. Ongena et al., Proc. of the 19<sup>th</sup> IAEA Fusion Energy Conference, Lyon, France, 14-19 October 2002
- [3] E. Joffrin et al., Plasma Phys. Control. Fusion **45**(2003)A367-A383
- [4] P. Dumortier et al., Proc. of the 30<sup>th</sup> EPS Conf. On Controlled Fusion and Plasma Physics, St Petersburg, Russia, 7-11 July 2003, P-1.91
- [5] G. Saibene et al., Plasma Phys. Control. Fusion **44**(2002)1769-1799
- [6] I. Voitsekovitch et al., this conference
- [7] P. Belo et al., this conference

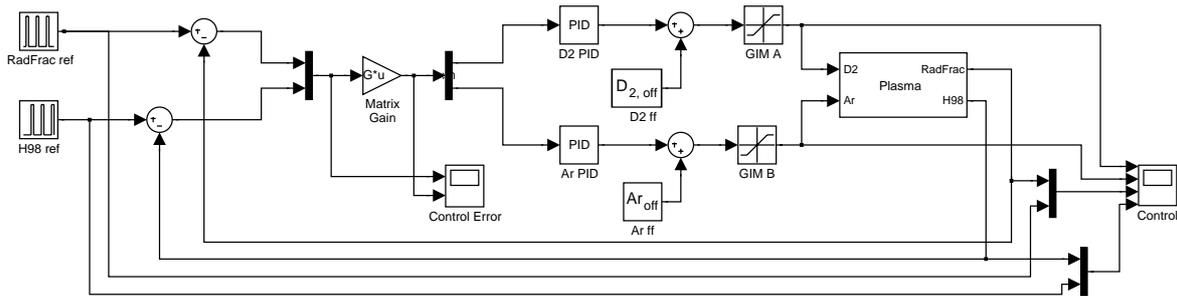


Fig. 1 Principle of the dual feedback control. Confinement and radiated power fraction are estimated real time and compared to the requests. The error signals are treated by a 2x2 matrix and the outputs are the differential Gas Injection Modules (GIM) control voltages. PIDs are used to adapt the dynamics of the response. An offset corresponding to the operating point values are added and minimum and maximum values are allowed for the GIM voltages, which control the GIM valve openings.

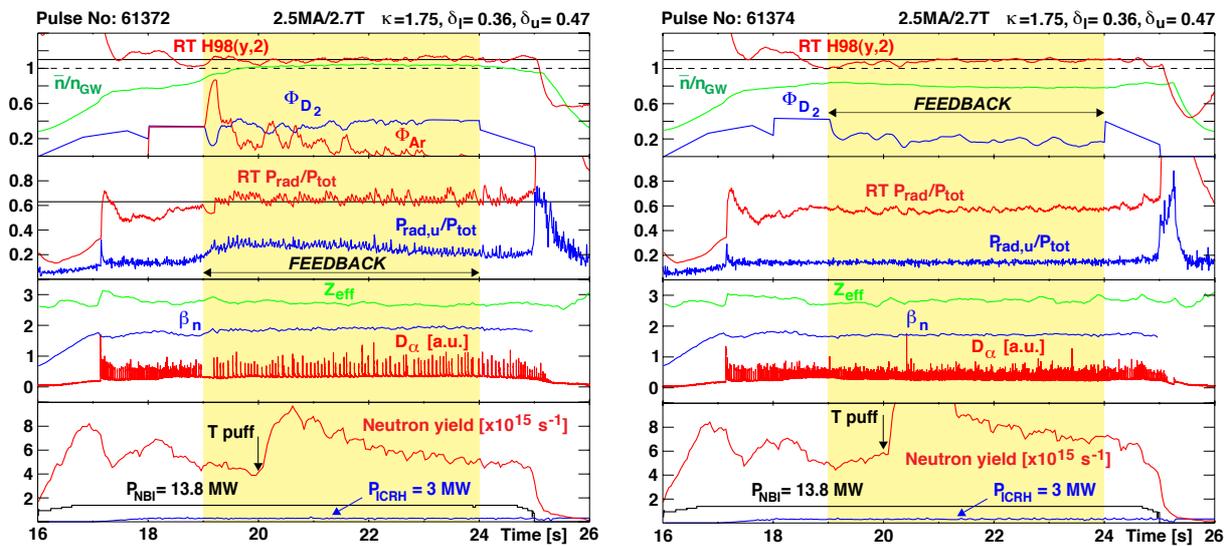


Fig. 2 Time traces of global plasma parameters in discharges with T puff: (left) Ar seeded discharge with dual feedback control and (right) reference discharge without Ar with single feedback control. RT  $H_{98y2}$  is the measured signal used for the feedback control and is not corrected for fast particles.

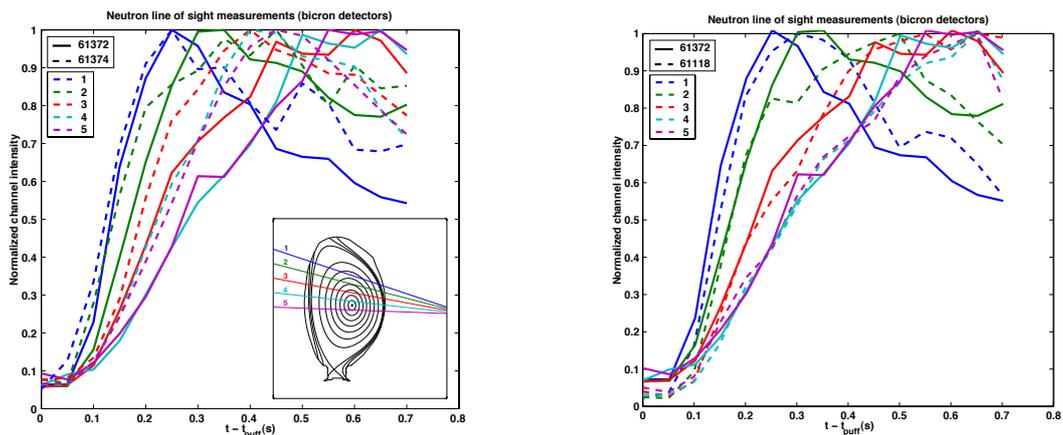


Fig. 3 Normalized channel intensity of 5 channels of the neutron profile monitor vs time from the T puff for (a) #61372 with Ar seeding and reference discharge #61374 without Ar seeding and (b) #61372 with Ar seeding and #61118 without Ar seeding but at same density as #61372 (but different  $B_t$ ).