

Target studies for the HiPER project

S. Atzeni¹, C. Bellei^{1,2}, A. Schiavi¹

¹ *Dipartimento di Energetica, Università di Roma "La Sapienza" and CNISM, Italy*

² *Blackett Laboratory, Imperial College, Prince Consort Road, London, UK*

Recently, a European collaboration has proposed the HiPER facility [1], aiming at the demonstration of laser driven inertial fusion fast ignition [2, 3]. According to the present design [4], HiPER will have a multi-beam, multi-ns pulse of about 250 kJ at the wavelength of 0.35 μm , and an ignition beam delivering about 70 kJ in about 15 ps at wavelength λ_{ig} of 0.53 μm or 0.35 μm . In the past two years we have addressed several issues concerning the design of targets for HiPER. We have first developed an integrated gain model, and then performed 1D simulations of laser driven compression, stability analyses by models using the time-dependent 1D flow as an input, and 2D simulations of ignition and burn. These studies have led to a reference conceptual design [4, 5], which is now under detailed investigation. Here, we summarize some of the main results, while a full discussion can be found in Ref. [5].

A crucial issue for fast ignition is the choice of ignition beam frequency. However, while both compression and burn have been studied in detail with reliable codes, coupling of the ultra-intense ignition beam with the plasma cannot yet be studied self-consistently [3]. In our study, it has been parametrized in a simple, rough way. We have assumed that the intense beam energy generates fast particles with penetration depth \mathcal{R} , with given efficiency η_{ig} (for which we have taken a reference value of 25%). We have used $\mathcal{R}(\text{g}/\text{cm}^2) = 0.6 f_{\text{R}} T(\text{MeV})$, where T is the hot electron temperature. This is related to igniting laser intensity I_{ig} and wavelength λ_{ig} by a ponderomotive scaling, $T(\text{MeV}) = [I_{\text{ig}} \hat{\lambda}^2 / (1.2 \times 10^{19} \text{W}/\text{cm}^2)]^{1/2}$. Here $\hat{\lambda}_{\text{ig}} = \lambda_{\text{ig}} / (1 \mu\text{m})$ and f_{R} is a free parameter. Both our analytical model (using an upgraded version [6] of a standard ignition criterion [7]) and simulations indicate that keeping the igniting beam energy below 100 kJ requires [8, 5] $f_{\text{R}} \hat{\lambda} < 0.5$, i.e. either second harmonic Nd:glass ignition laser and/or electron range shortening. This is confirmed by recent work by the LLE group [9].

We have considered simple all-DT capsules, driven by a shaped pulse, preceded by an intense picket to shape the ablator adiabat [10], thus reducing the growth rate of the Rayleigh-Taylor instability (RTI). In this way, we achieve low average fuel isentrope, $\alpha \simeq 1$, and integrated RTI exponential growth factor below 5 for all perturbation modes. The reference capsule, pulse, implosion diagram, and a few main results are shown in Fig. 1 (2T IMPLO simulation). At stagnation the density of most of the fuel exceeds 300 g/cm^3 , with a peak of about 500 g/cm^3 (see also Fig. 2). The confinement parameter $\langle \rho R \rangle$ peaks at 1.3–1.6 g/cm^2 (depending on the

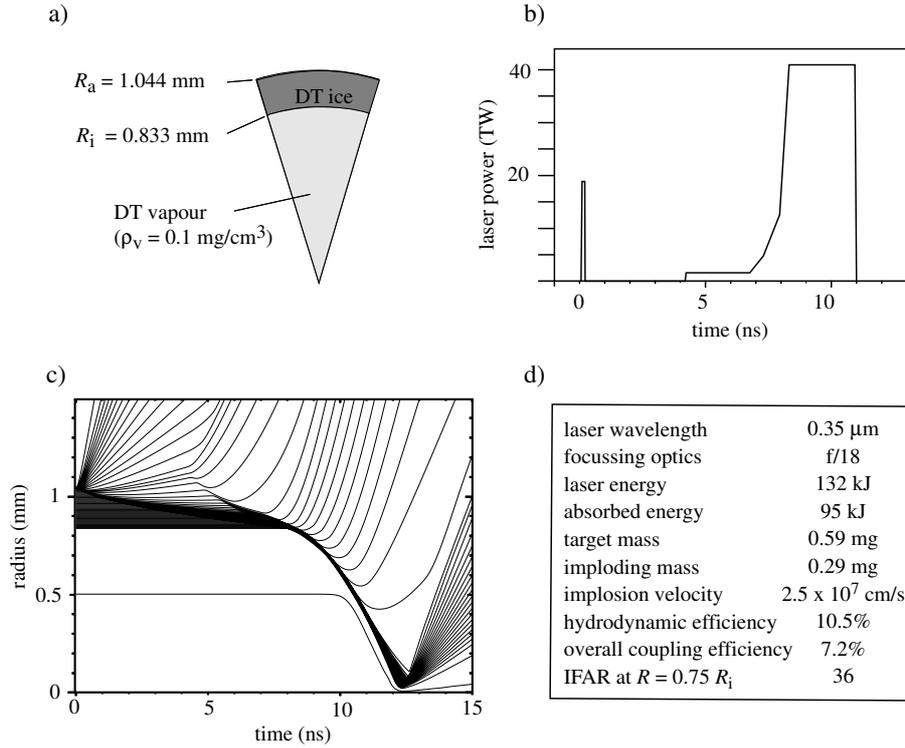


Figure 1: Reference target: target sketch, laser pulse, implosion flowchart, main drive parameters and implosion results.

simulation model). These results have been confirmed by independent calculations performed by GIFU-UPM [11] and CELIA [12].

Target and pulse have been scaled in size and energy, by keeping fixed the laser intensity and the shell initial aspect ratio, and scaling mass and energy as R^3 , and times as R . Taking the previous target (with mass M_0) as reference, we designed a *small* target with mass $(2/3)M_0$ and a *large* target with mass $2M_0$. After scaling, the pulse has been optimized by small changes to the initial picket, and all targets achieve nearly the same density, while $\langle \rho R \rangle \propto M^{1/3}$ [13].

Ignition and burn have been studied by a large set of 2D simulations, assuming as initial conditions those computed by the 1D run around peak $\langle \rho R \rangle$, and varying pulse intensity, duration, spot size, and particle penetration depth. An example of a 2D simulation of the ignition of the reference target is shown in Fig. 2. A 16-ps long, 20 μ m in radius, pulse of particles with assigned penetration depth \mathcal{R} impinges on the fuel. In this case, $\mathcal{R} = 1.2$ g/cm², the beam intensity is 10^{20} W/cm², and the total particle beam energy is 20 kJ. Assuming coupling efficiency $\eta_{ig} = 0.25$, the laser intensity is 4×10^{20} W/cm² and the assumed range is consistent with $f_R \lambda_{ig} \simeq 0.4$ μ m. The corresponding ignition laser energy is 80 kJ. According to the 2D simulation, the target releases 13 MJ of fusion energy, which, assuming again $\eta_{ig} = 0.25$, cor-

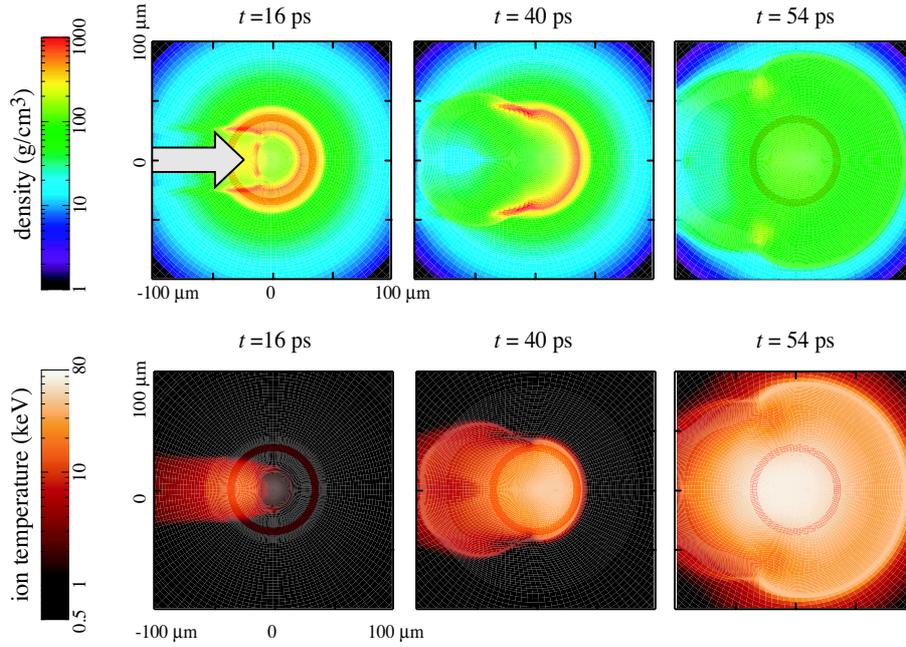


Figure 2: 2D simulation of fast-ignition and burn of the reference target. Density and temperature maps at selected times. The origin of time here corresponds to time $t = 12.35$ ns in the 1D simulation. The arrow in the top left frame indicates the incoming particle beam.

responds to gain $G \simeq 60$. Similar results (with gain in the range $G = 52\text{--}57$) are obtained with intensity reduced to 7.5×10^{19} W/cm², somewhat longer pulse and/or larger focal spot, and total beam energy of 18-20.5 kJ. In these cases, $f_R \lambda_{ig} \simeq 0.5$ μm. When the initial condition is taken from the 1D, 3T IMPLO simulation (giving somewhat smaller confinement) the fusion yield is estimated to decrease to about 10 MJ, and the gain to 40.

We have performed a series of runs for each of the three targets studied in the previous section. When beam parameters and beam synchronization are optimized, the targets compressed by 92, 132, and 270 kJ pulses, release about 6, 13 and 38 MJ of fusion energy, respectively. Assuming again $\eta_{ig} = 0.25$, the target gains are about 40, 60, and 110 respectively. As shown in Fig. 3, these results are in very good agreement with the gain model [5].

Concerning the sensitivity to beam param-

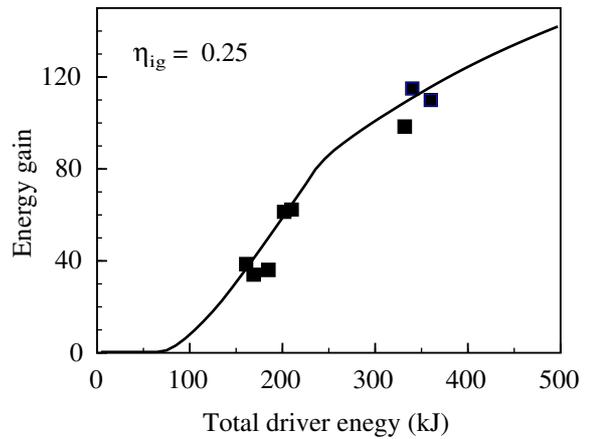


Figure 3: Gain vs total laser energy. Points: 2D simulations. Curve: model [5]

eters, we find [see Fig. 4a)] a sharp ignition threshold for each value of the penetration depth, with optimal $\mathcal{R} \simeq 1.2 \text{ g/cm}^2$ for the reference target. This is clearly seen in Fig. 4b), where the ignition energy is plotted as a function of \mathcal{R} for the three considered targets. Finally, concerning the synchronization of the laser pulses, we find that the ignition pulse must be fired within a 75-100 ps window, centered about 30–50 ps before the time of peak $\langle \rho R \rangle$.

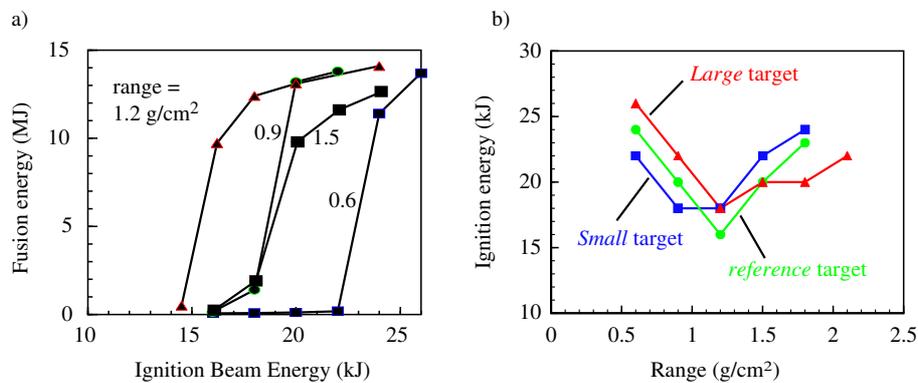


Figure 4: a) Fusion energy vs energy delivered by the igniting beam, for the reference target and different values of the penetration depth of the igniting particles; b) Ignition energy vs range for the three targets considered in the present study.

This work was supported in part by the Italian Ministry of University and Research projects PRIN 2005029572 and FIRB RBNE03N48B "BLISS". We thank J. Honrubia, X. Ribeyre, G. Schurtz for discussions and for providing us simulation results prior to publication.

References

- [1] M. Dunne, *Nature Phys.* **2**, 2 (2006)
- [2] M. Tabak et al., *Phys. Plasmas* **1**, 1626 (1994).
- [3] Special Issue on Fast Ignition, *Fusion Sci. Technol.* **49**, No. 3, 249-552 (2006)
- [4] HiPER Technical Design Report; <http://www.hiper-laser.org>
- [5] S. Atzeni, A. Schiavi and C. Bellei, *Phys. Plasmas* **14**, 052702 (2007).
- [6] M. Tabak, D. Hinkel, S. Atzeni, E. M. Campbell, K. Tanaka, *Fusion Sci. Technol.* **49**, 254 (2006);
M. Tabak and D. Callahan, *Nucl. Instr. Methods A* **554**, 48 (2005)
- [7] S. Atzeni, *Phys. Plasmas* **6**, 3336 (1999)
- [8] S. Atzeni and M. Tabak, *Plasma Phys. Controll. Fusion* **47**, B769 (2005)
- [9] A. A. Solodov et al., *Phys. Plasmas* **14**, 062701 (2007).
- [10] K. Anderson and R. Betti, *Phys. Plasmas* **11**, 5 (2004)
- [11] J. Honrubia, UPM-GIFI, Madrid, private communication.
- [12] X. Ribeyre, G. Schurtz et al., CELIA, Bordeaux, private communication, to be published (2007).
- [13] R. Betti and C. Zhou, *Phys. Plasmas* **12**, 110702 (2005)