

## Design Parameters for DIII-D Steady-State Scenario Discharges

J.R. Ferron<sup>1</sup>, C.T. Holcomb<sup>2</sup>, T.C. Luce<sup>1</sup>, J.M. Park<sup>3</sup>, P.A. Politzer<sup>1</sup>, F. Turco<sup>4</sup>, J.C. DeBoo<sup>1</sup>,  
 E.J. Doyle<sup>5</sup>, A.W. Hyatt<sup>1</sup>, Y. In<sup>6</sup>, R.J. La Haye<sup>1</sup>, M. Murakami<sup>3</sup>,  
 M. Okabayashi<sup>7</sup>, T.W. Petrie<sup>1</sup>, C.C. Petty<sup>1</sup>, H. Reimerdes<sup>8</sup>, T.L. Rhodes<sup>5</sup>, A.E. White<sup>9</sup>,  
 and L. Zeng<sup>5</sup>

<sup>1</sup>General Atomics, PO Box 85608, San Diego, California 92186-5608, USA

<sup>2</sup>Lawrence Livermore National Laboratory, Livermore, California 94550, USA

<sup>3</sup>Oak Ridge National Laboratory, Oak Ridge, Tennessee 37831, USA

<sup>4</sup>Oak Ridge Associated Universities, Oak Ridge, Tennessee 37831, USA

<sup>5</sup>University of California-Los Angeles, Los Angeles, California 90095, USA

<sup>6</sup>FAR-TECH, Inc., 3550 General Atomics Ct, San Diego, California 92121, USA

<sup>7</sup>Princeton Plasma Physics Laboratory, PO Box 451, Princeton, New Jersey 08543 USA

<sup>8</sup>CRPP-EPFL, CH-1015 Lausanne, Switzerland

<sup>9</sup>Massachusetts Institute of Technology, Cambridge, Massachusetts, USA

In recent DIII-D experiments [1-3], we have systematically studied the physics that affects the choice of parameters for a discharge where the goal is 100% noninductively driven current ( $f_{NI}=1$ ) at high plasma pressure ( $\beta_N \geq 4$ ). The choice of parameters will be a compromise that results in sufficiently high values of the bootstrap current fraction  $f_{BS}$ , the efficiency of the externally driven current, and the fusion gain parameter  $G = \beta_N H/q_{95}^2$  [4]. The available adjustable parameters are the  $q$  profile, the toroidal field  $B_T$ , and the plasma density  $n$ . The tokamak geometry and the discharge shape are constrained by the existing DIII-D design.  $\beta_N$  will be close to the stability limit, which must be high enough to give access to the required  $f_{BS}$  and  $G$ . The input power is that required for external current drive at  $f_{NI}=1$  and it must match the power required to maintain the pressure against transport losses [4].

To assess the effect of the  $q$  profile [2], the self consistent response of the temperature ( $T$ ) and density profiles was measured in two sets of discharges with  $q_{min}$  and  $q_{95}$  varied independently ( $q_{95}$  is the value of  $q$  near the discharge boundary and  $q_{min}$  is the minimum value), one set at  $\beta_N \approx 2.8$  and one set with the maximum available neutral beam power injected ( $\beta_N \approx 3.5$  in most cases). The focus was on weak shear discharges without large, local pressure gradients that would reduce the stable  $\beta_N$ . The effects on stability and transport of more detailed features of the  $q$  profile such as the profile of the magnetic shear and the radial location where  $q=q_{min}$ , also important for the choice of steady-state scenario parameters, will be considered in future work. Changes in the measured  $n$  and  $T$  profiles resulted in a systematic broadening of the pressure profile as either  $q_{min}$  or  $\beta_N$  was increased. At the maximum  $\beta_N$ , the peaking factor for the thermal pressure  $f_p$  is roughly independent of  $q_{min}$  and  $q_{95}$ .

The calculated  $f_{BS}$  for the experimental data is maximum at the largest value of  $q_{95}$  and the largest values of  $\beta_N$  (Fig. 1), with variation of  $f_{BS}$  with  $q_{core}$  comparable to the variation with  $q_{95}$ . At  $\beta_N \approx 2.8$ , the trend is for  $f_{BS}$  to increase with  $q_{core}$  except at  $q_{core} \approx 2$  where the relatively high  $q_{core}$  is offset by reduced  $T$  and  $n$  gradients. At the maximum beam power,  $f_{BS}$  increases

with  $q_{\text{core}}$  at the lowest  $q_{95}$  values, but at  $q_{95}=6.8$  the scaling is the opposite because at the lowest  $q_{\text{core}}$ ,  $\beta_N$  was relatively high (3.8) and at the highest  $q_{\text{core}}$ ,  $\beta_N$  was relatively low (3.1). The neutral beam current drive fraction [2] was highest in the relatively low  $n$  discharges at the highest  $q_{\text{core}}$ , so that the calculated  $f_{\text{NI}}$ , in most cases, also increases with both  $q_{\text{core}}$  and  $q_{95}$  (Fig. 2).

At the highest values of  $\beta_N$  the reduced  $f_p$  results in  $J_{\text{BS}}$  profiles which are relatively uniform in the region inside the H-mode pedestal (Fig. 3). This  $J_{\text{BS}}$  profile shape is not a good match to the peaked profile of current density  $J$  in weak shear discharges. In addition,  $J_{\text{BS}}$  is only a small fraction of  $J$  in the inner portion of the discharge. Therefore, to achieve  $f_{\text{NI}}=1$ , the profile of the externally driven noninductive current that results in a match between the total noninductive current density  $J_{\text{NI}}$  and  $J$  will need to be peaked on axis.

The scan of the  $q$  profile indicates that  $f_{\text{NI}}=1$  with  $f_{\text{BS}}>0.5$  is presently best achieved in DIII-D at  $q_{95}>6$ . The preferable  $q_{\text{min}}$  value is relatively high (e.g. >2) to minimize the external current drive requirement near the axis by reducing  $J$  and increasing  $J_{\text{BS}}$  in that region, but  $\beta_N$  must be increased above the value observed at the highest  $q_{\text{core}}$  value in this experiment. An excess of externally-driven current density near the axis which reduces  $q_{\text{min}}$ , as in the case in Fig. 3, must be avoided. This is possible through injection of a substantial fraction of the neutral beam power off-axis, consistent with the case in Fig. 3 where  $\approx 20 \text{ A cm}^{-2}$  additional  $J_{\text{NI}}$  is required in the region  $0.2 < \rho < 0.7$  at  $q_{95}>6$  in order to reach  $f_{\text{NI}}=1$ . The capability to inject 5 MW off-axis has been made available for 2011 DIII-D experiments. Modeling of a discharge with 5 MW on-axis beam injection, 5 MW off-axis injection, and 3.5 MW off-axis ECCD predicts  $q_{\text{min}}=2$  with a fully penetrated electric field.

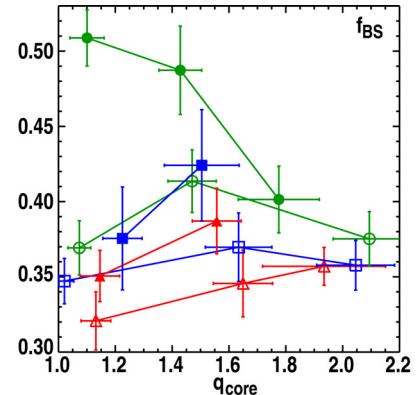


Fig. 1. Calculated bootstrap current fraction.  $\beta_N=2.8$  (open), maximum beam power (closed),  $q_{95}$ : 4.5 (triangles), 5.6 (squares), 6.8 (circles).  $q_{\text{core}}$  is the average value of  $q$  in the region  $0.0 < \text{normalized radius } \rho < 0.3$ .

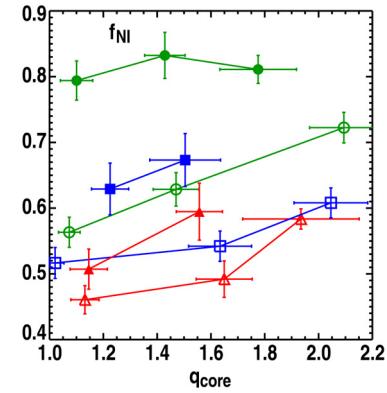


Fig. 2. Noninductive current fraction. Symbols are as in Fig. 1.

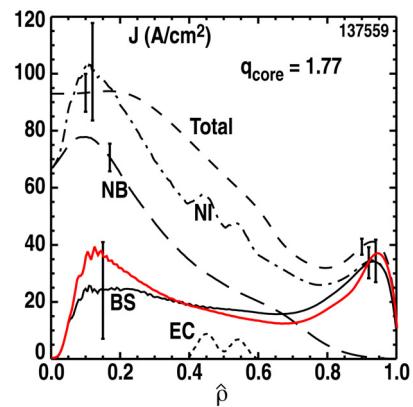


Fig. 3. Current density profiles in a discharge with the maximum neutral beam power,  $q_{95}=6.8$ ,  $q_{\text{core}}=1.77$ . The total is from an equilibrium reconstruction, bootstrap (BS), electron-cyclotron (EC), neutral beam (NB) and total noninductive (NI) are calculated. The red curve is bootstrap at  $\beta_N \approx 2.8$ .

In order to satisfy the requirements on the figure of merit  $G$  in the steady-state scenario of ITER or in a reactor,  $q_{95} \approx 5$  is thought to be necessary. The small value of  $f_{BS} \approx 0.4$  observed in this experiment at  $q_{95} \approx 5$ , though, is not sufficient for practical steady-state operation. As  $q_{95}$  is reduced with fixed  $q_{min}$ , the additional current density is located off axis. The primary path to increased  $f_{BS}$  with  $J_{BS}$  added off-axis is broadening of the pressure profile to allow stable operation at increased  $\beta_N$ . Broadening of the pressure profile increases  $n$  and  $T$  gradients off-axis, and thus  $J_{BS}$  there, and results in higher stability limits. For MHD stability, the peaking factor for the fast ion pressure must be comparable to  $f_p$  so that the total pressure peaking factor is low. This will be facilitated by off-axis neutral beam injection in DIII-D. Previous estimates have found ideal-wall stability at  $\beta_N = 4$  with total pressure peaking factor less than 2.6 [5].

At fixed  $\beta_N$  and  $q_{95}$ , the toroidal field strength ( $B_T$ ) is the parameter to adjust to obtain a balance between the required current drive ( $P_{CD}$ ) and heating powers when all external power sources provide both heating and current drive [3]. In cases like DIII-D where there is no  $\alpha$ -heating, the fraction of  $I_p$  driven by external current sources  $f_{CD}$  would be expected to increase with  $B_T$  as a result of the scaling of energy confinement with input power. Assuming  $H_{89p}$  confinement scaling,  $P_{CD} \propto B_T^{1.9}$  at constant  $\beta_N$  and  $q_{95}$ , and for current drive efficiency of the form [4]  $nI_{CD}/(P_{CD}T_e)$ , then  $f_{CD} = C_{CD}P_{CD}/\beta_N q_{95}^2/(B_T f_G^2) \propto B_T^{0.9}$  (where  $f_G$  is the Greenwald density fraction and  $C_{CD}$  is a constant). If  $n$  is maintained at a low level through pumping of divertor exhaust so that  $f_G$  decreases as  $B_T$  is increased, the driven current increases faster than linearly with  $P_{CD}$  because of increases in  $T_e$ . This type of scaling was demonstrated in DIII-D in a series of neutral-beam-heated discharges [3] with  $q_{95} = 6.2$  and  $\beta_N \approx 3.4$  (Fig. 4). A factor 1.2 change in  $B_T$  required a factor 1.4 increase in the neutral beam power, resulting in a factor 1.6-1.8 increase in the total neutral beam driven current. Because  $B_T/I_p$  was held constant during the scan,  $f_{NBCD}$  and  $f_{NI}$  also increased.

In DIII-D steady-state scenario experiments, the minimum achievable  $n$  is used in order to maximize  $f_{CD}$ . To minimize  $n$ , the plasma shape is chosen to optimize the use of the divertor cryopump capability [1]. Typically  $H_{98} = 1.5$  as long as  $n$  is above approximately  $4.5 \times 10^{19} \text{ m}^{-3}$ , but as  $n$  decreases during the high  $\beta_N$  phase of a discharge as the wall particle source is depleted, a trend toward decreasing  $\tau_E$  is observed (Fig. 5). This places constraints on the ability to reduce  $n$  in order to maximize the total externally driven current. No reproducible

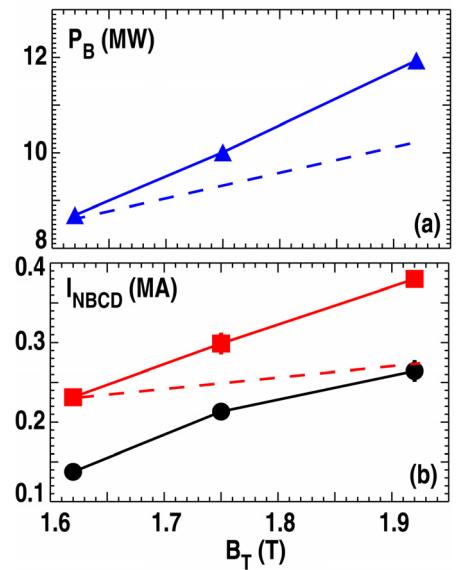


Fig. 4. As a function of the toroidal field strength (a) neutral beam power at constant  $\beta_N$ , (b) total neutral-beam-driven current. The dashed lines show the trend that would be expected from scaling which is linear in  $B_T$ . Anomalous fast ion diffusion: none (red), 1-2  $\text{m}^2/\text{s}$  (black).

quantitative relation between  $n$  and  $H_{98}$  has been found as yet, but for  $n$  near  $4.0 \times 10^{19} \text{ m}^{-3}$ ,  $H_{98}$  typically is about 1.1.

A set of self-consistent parameters for  $f_{NI}=1$  operation in DIII-D can be determined by combining the observed scalings of  $f_{BS}$  and  $f_{CD}$ . A fit to the data from the  $q$  profile scaling experiment yields  $C_{CD} = 1.03 \times 10^{-4}$  and  $f_{BS}$  scales with  $\beta_N$ ,  $q_{core}$ ,  $q_{95}$  and  $f_p$  as shown in [2]. In the example in Fig. 6, the circles highlight  $f_{NI}=1$  solutions at two values of  $q_{95}$ . At  $q_{95} \approx 6.2$ ,  $f_{NI}=1$  at  $\beta_N=3.8$  (similar to the discharge discussed in [1]). For the heating and current drive powers to be balanced, the required confinement enhancement factor  $H_{89}$ , 2.1 in this case, must match the value in the discharge. At  $q_{95} \approx 5$ , the  $f_{NI}=1$  solution is at higher  $\beta_N=4.1$ , requiring a larger  $H_{89}=2.3$ . To adjust the power balance,  $B_T$  can be changed. For instance, for the parameters of Fig. 6 but at higher  $B_T = 2.0 \text{ T}$ , the  $f_{NI}=1$  solution at  $q_{95} \approx 6.2$  is at lower  $\beta_N=3.6$  but higher  $H_{89}=2.2$ , and at  $q_{95} \approx 5$  the solution moves to  $\beta_N=3.85$ ,  $H_{89}=2.5$ . In all cases, MHD stability must be sufficient to reach the required  $\beta_N$ .

Work supported in part by the US Department of Energy under DE-FC02-04ER554698, DE-AC52-07NA27344, DE-AC05-06OR23100, DE-FG02-08ER54984, DE-FG02-06ER84442, DE-AC05-00OR22725, DE-AC02-09CH11466 and DE-FC02-99ER54512.

- [1] C.T. Holcomb *et al.*, 2009 Phys. Plasmas **16** 056116
- [2] J.R. Ferron *et al.*, 2011 Nucl. Fusion **51** 063026
- [3] J.R. Ferron *et al.*, 2011 “Balancing Current Drive and Heating in DIII-D High Noninductive Current Fraction Discharges,” submitted to Nucl. Fusion (2011).
- [4] C. Gormezano *et al.*, 2007 Nucl. Fusion **47** S285
- [5] J.R. Ferron *et al.*, 2005 Phys. Plasmas **12** 056126

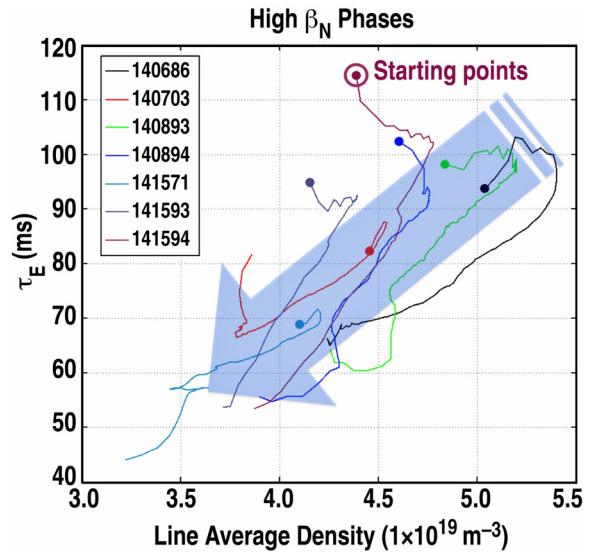


Fig. 5. For several discharges, in the approximately constant  $\beta_N > 3$  phase, energy confinement time as a function of density.

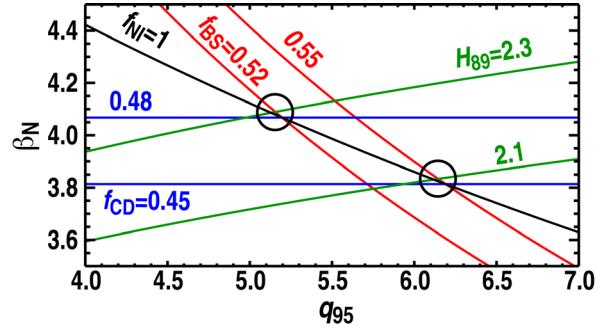


Fig. 6. Contours of self-consistent discharge parameters derived from  $f_{BS}$  and  $f_{CD}$  scalings and  $f_{NI}=f_{BS}+f_{CD}$  with  $B_T=1.75 \text{ T}$ ,  $q_{core}=2$ ,  $n=4.5 \times 10^{19} \text{ m}^{-3}$ ,  $f_p=2.5$ ,  $P_{CD}=16 \text{ MW}$ , and fast ion stored energy fraction = 0.25. The circles highlight  $f_{NI}=1$  solutions at two values of  $q_{95}$ .