

## Wide Pedestal Quiescent H-mode Plasmas in DIII-D Tokamak

Xi Chen<sup>1</sup>, K.H. Burrell<sup>1</sup>, T.H. Osborne<sup>1</sup>, K. Barada<sup>2</sup>, D. R. Ernst<sup>3</sup>, C. Chrystal<sup>1</sup>, B.A. Grierson<sup>4</sup>, G.R. McKee<sup>5</sup>, T. Odstrcil<sup>3</sup>, C.P. Paz-Soldan<sup>1</sup>, C.C. Petty<sup>1</sup>, T.L. Rhodes<sup>2</sup>, J.C. Rost<sup>3</sup>, W.M. Solomon<sup>1</sup>, T.M. Wilks<sup>3</sup>, Z. Yan<sup>5</sup> and L. Zeng<sup>2</sup>

<sup>1</sup> General Atomics, P.O. Box 85608, San Diego, CA 92186-5608, USA


<sup>2</sup> University of California Los Angeles, P.O. Box 957099, Los Angeles, CA 90095 USA

<sup>3</sup> Massachusetts Institute of Technology, Cambridge, MA 02139, USA

<sup>4</sup> Princeton Plasma Physics Laboratory, P.O. Box 451, Princeton, NJ 08543-0451, USA

<sup>5</sup> University of Wisconsin-Madison, 1500 Engineering Dr., Madison, WI 53706, USA

Quiescent H-mode (QH-mode) is a naturally ELM-stable high performance operation mode which has been obtained in DIII-D, ASDEX Upgrade, JET, and JT-60U [1 and references within]. The additional transport to maintain constant density and radiation is provided by the benign coherent edge harmonic oscillations mode (EHO) [2] which is thought to be a kink/peeling mode [3]. A new QH-mode regime with enhanced pedestal has been discovered in DIII-D at reactor-relevant low torque and collisionality [4]. The regime was originally found in conventional QH-mode when the counter- $I_p$  neutral beam torque drops to  $\sim 2$  Nm in double null plasma shapes. It is referred to as ‘wide-pedestal QH-mode’ because the pedestal width exceeds the EPED kinetic ballooning mode (KBM) limit [5]. Across the transition from QH to wide-pedestal QH, the pedestal electron pressure generally increases by 60% and widens by 50% and the plasma confinement (ITER  $Hy_{98y2}$ ) rises by 40%. The onset of broadband edge MHD modes and micro-turbulence accompanied with a lower ExB shear in this region is a common feature of the wide-pedestal QH, instead of EHO. It is conjectured that the increased transport provided by these edge modes reduces the pedestal gradients resulting in a higher pedestal while still remaining below the ELM-limit. Since its discovery, several experiments have been conducted in DIII-D to explore its operational space with

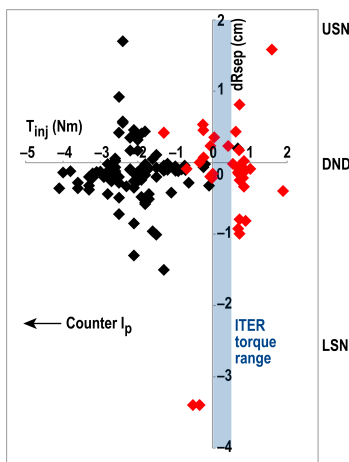

**Figure 1: Operating space of wide-pedestal QH-mode (black: access; red: sustain)**


emphasis on parameters that are practical for the utilization of wide-pedestal QH-mode in other present-day devices, and for its application to ITER and burning plasmas.

The neutral beamline configuration in DIII-D allows (a) independent variation of the input NBI torque and power and (b) a range of net-torque from co- to ctr- $I_p$  direction using a combination of co- and counter-NBI. The wide-pedestal QH regime was originally discovered in conventional QH plasmas when the net counter-NBI torque was reduced to a level of  $\sim 2$  Nm. To date, this regime has been accessed with NBI torque ranging from 4.1 Nm counter- to 0.7 Nm co-current, and has been

sustained over even broader range from 4.1Nm-ctr to 1.9Nm-co (Fig. 1). Note that there were no 3D magnetic fields applied in these experiments except that for error field correction (EFC). The operating torque range for wide-pedestal QH exceeds the scaled DIII-D torque range that is equivalent to the anticipated torque range in ITER using the scaling in Ref. 6.

If wide-pedestal QH-mode is to be used in future devices, we need also to demonstrate zero torque startup. Wide-pedestal QH with net zero torque throughout the whole discharge has been attained on DIII-D [7]. As illustrated in Fig. 2(#174658, red), the initial formation phase has only net-0.04Nm co-NBI while the sustainment phase has only net-0.06Nm ctr-NBI. Note results presented in this paper all have plasma current and toroidal magnetic field in the same direction (clockwise). The small finite non-zero torque resulted from the uncertainty associated with the beam output even though it was commanded to net zero torque. These discharges are stationary for more than  $20\tau_E$  (limited only by NBI duration) with reactor-relevant plasma conditions ( $\beta_N=1.75$ ,  $H_{98y2}=1.25$ ,  $v_{*,ped}=0.3-0.4$ ) in DN shape. With similar input power, the pedestal height and width of wide-pedestal QH, accessed with zero torque (red), reached similar values as those accessed during a ramping down of the torque (black). Although zero torque operation of wide-pedestal QH does not require 3D fields application (except for EFC) (e.g., #163518), these zero torque start-up discharges benefit from neoclassical toroidal viscosity (NTV) torque generated by applied 3D fields. The NTV torque provides enough toroidal rotation to avoid locking at low torque, for example, in #174658, the external coils are switched on shortly after the transition from L-mode to wide-pedestal QH-mode, the edge of plasma remains ctr-rotating even at zero NBI torque. The good wall condition (low collisionality), good EFC, and excellent edge stability limit from high shaping (high triangularity) also contribute to the success of access wide-pedestal QH-mode with zero torque.

The wide-pedestal QH-mode was originally discovered in balanced double null (DN) shape, with  $dR_{sep}\sim 0$  ( $dR_{sep}$  is the radial distance between the flux surfaces connected to the

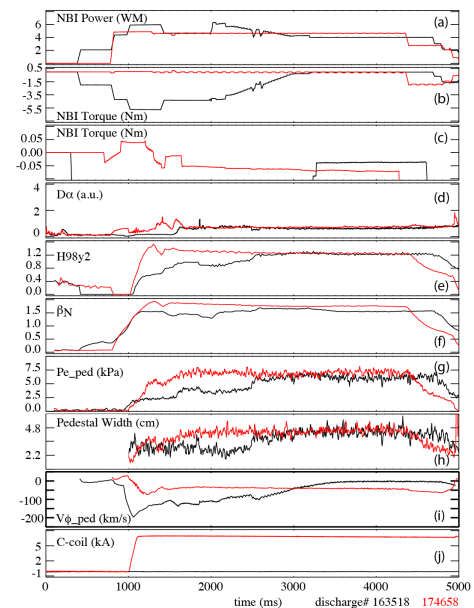


**Figure 2: Time trace of (a) NBI power, (b) and (c) NBI torque, (d)  $D\alpha$  signal, (e)  $H_{98y2}$ , (f)  $\beta_N$ , pedestal electron (g) pressure and (h) width, (i) pedestal rotation velocity, (j) c-coil current in wide-pedestal QH discharges: #163518 (black) accessed with torque ramp down and #174658 (red) with zero torque start-up**

upper and lower x-point at the outer midplane). The same torque ramp experiments conducted in upper single null (USN) shape with  $dR_{sep} \sim +2\text{cm}$  resulted in loss of coherent EHO and occurrences of ELMs at low torque [8]. New experiments have been carried out to explore the operating space in terms of plasma shape, especially towards more ITER-relevant lower single null (LSN) shape. Wide-pedestal transition has now been seen in a range of plasma shapes including USN, DN and LSN, in terms of  $dR_{sep}$ , ranging from  $-1.5\text{cm}$  to  $+1.6\text{cm}$ . Furthermore, the wide-pedestal QH-mode has been sustained in a wider range of  $dR_{sep}$ , from  $-3.4\text{cm}$  (LSN) to  $+1.6\text{cm}$  (USN) as illustrated in Fig. 1. For the LSN shape with  $dR_{sep} = -3.4\text{cm}$ , the average triangularity  $\delta_{avg}$  is  $\sim 0.44$  similar to the ITER target  $\delta_{avg}$ .

No power limit was observed in the conventional QH-mode with coherent EHO such that the plasma remains ELM-stable until the input power reaches the core beta limit [2]. Previously, ELMs were observed in those discovery experiments of wide-pedestal QH-mode when the input power was increased by  $\sim 35\%$  [4]. No ELM occurs in the new experiments with higher power but lower density than those original discovery experiments. This suggests that the return of ELMs in those previous experiments might be associated with the higher density rather than the higher power, similar to the conventional QH-mode where the pedestal pressure increases with density and ELMs appear at high density. New NBI power scan experiments at moderate density are conducted and the stationary wide-pedestal QH-mode is produced over the entire power range studied ( $3.9\text{--}5.5\text{MW}$ ). The highest NBI power in these experiments is limited because the total torque is kept near zero while there is only one beamline directed opposite to the other three.

Unlike other H-mode plasmas on DIII-D which suffer reduced confinement and performance at low torque and rotation, wide-pedestal QH favors low torque similar to the conventional QH-mode. In the highest power case mentioned in the previous paragraph,  $\beta_N$  reaches 2.3 and H98y2 reaches 1.6 simultaneously. Another interesting observation is that the H98y2 scaling increases with power while the global energy confinement time  $\tau_E$  in wide-pedestal QH is independent of input power.

Using RF heating is another way to operate at

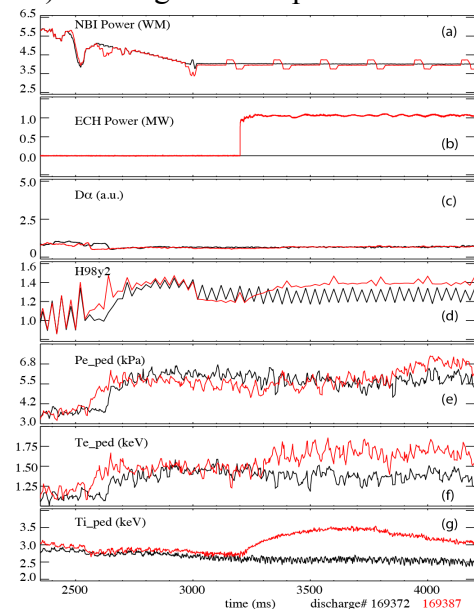


**Figure 3: Time trace of (a) NBI torque, (b) ECH power, (c)  $D\alpha$  signal, (d) H98y2, pedestal (e) electron pressure, (f) electron temperature and (g) ion temperature in discharge #169372 (black) and 169387 (red)**

low torque thus we also start to investigate the compatibility of wide-pedestal QH with ECH injection. In contrast to most H-mode and conventional QH-mode on DIII-D where confinement generally degrades with ECH, additional confinement improvements in both core and pedestal with ECH injection have been observed in some wide-pedestal QH-mode discharges. An example is shown in Fig. 3 where 1MW ECH is injected into the core (deposited around  $\rho \sim 0.25$ ) of a wide-pedestal QH-mode (#169387) which has 4MW NBI power. Both the pedestal pressure and global confinement factor ( $H_{98y2}$ ) grow higher compared to early in the discharge or a similar discharge (#169372) without ECH injection. The pressure increase is mostly from the temperature raise which is seen in both electron and ion channels. The discharge remains ELM-stable and has little change in rotation with ECH injection. Increased  $E \times B$  shear just inside the pedestal combining with core profile stiffness is thought to improve confinement with ECH.

The role of edge magnetic and density fluctuations in forming the wide pedestal is being studied. The broadband MHD is composed of two counter-propagating low- $k$  branches [8] while the intermediate- $k$  density turbulence propagates in the electron-direction (lab frame) and oscillates periodically [9]. A flat spot is observed in the pedestal profiles of wide-pedestal QH-mode, especially that of the electron temperature. The location of the flat spot is close to the location of the peaking of the amplitudes of some of these edge modes (Fig. 4). Linear and non-linear simulations are carried out to investigate these modes.

Low torque (low rotation) operation has been very challenging where RMP-ELM suppression is lost and plasmas often suffer confinement degradation and/or lock modes. Wide-pedestal QH-mode might be a solution for this. We are working on understanding the physics for its low rotation access and further extending it to lower  $q_{95}$  (so far it has been obtained  $4.7 < q_{95} < 7.5$  and 3.8 transiently) and in condition with plasma current and toroidal magnetic field in opposite directions.

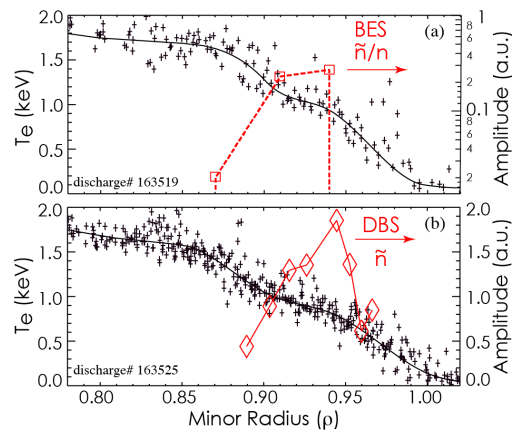

**Figure 4: Electron temperature profiles and density fluctuations of (a) low- $k$  (lab frame) electron-directed MHD measured by BES and (b) (lab frame) electron-directed intermediate- $k$  turbulence measured by DBS in discharge 163519 and 163525**

- [1] K.H. Burrell, *et al.*, Nucl. Fusion 49, 085024 (2009)  
 [2] K.H. Burrell *et al.*, Phys. Plasmas 12, 056121 (2005)  
 [3] P.B. Snyder, *et al.*, Nucl. Fusion 49, 961 (2007) [4] K.H. Burrell *et al.*, Phys. Plasmas 23, 056103 (2016);  
 Xi Chen, *et al.*, Nucl. Fusion 57, 022007 (2017) [5] P.B. Snyder, *et al.*, Nucl. Fusion 51, 103016 (2011)  
 [6] A.M. Garofalo, *et al.*, Nucl. Fusion 51, 083018 (2011) [7] K.H. Burrell, *et al.*, Nucl. Fusion (to be submitted)  
 [8] Xi Chen, *et al.*, Nucl. Fusion 57, 086008 (2017) [9] K. Barada, *et al.*, Phys. Rev. Lett. 120, 135002 (2018)

Work supported in part by DE-FC02-04ER54698, DE-FG02-08ER54984, DE-FG02-94ER54235, DE-AC02-09CH11466, DE-FG02-08ER54999. DIII-D data shown here can be obtained in digital format at [https://fusion.gat.com/global/D3D\\_DMP](https://fusion.gat.com/global/D3D_DMP). This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.